

Liquid Level Float Sensors

With a compact-sized float, slosh shield and weighted collar, the LSF provides leak detection for a wide variety of applications. Ideal for use in stand pipes or sumps. Contact the factory for information on compatible controllers and special applications.



LSF


Specifications

Operating Temperature	
Oil	-40° F to +230° F (-40° C to +110° C)
Water	to +180° F (82.2° C)
Stem & Mounting Material	Brass
Float Material	Buna N
Pressure, PSI, Max.	150
Switch	SPST, 20VA, N.C., Dry
Electrical Termination	PVC Cable jacket

*Consult factory for compatible controllers

**Current published specifications are subject to change without notification.

Verify specifications with manufacturer.

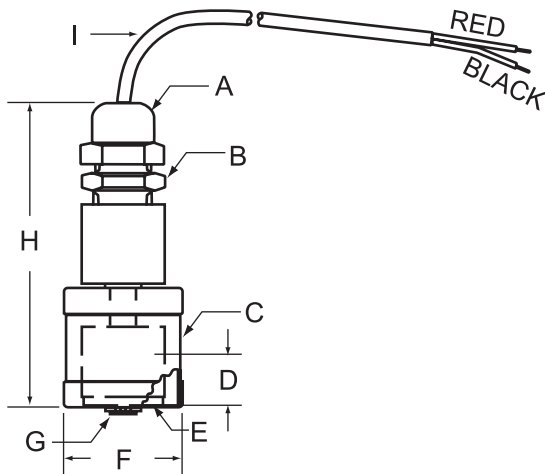

- A Sealing Nut
- B Liquid Tight Fitting
- C Slosh Shield
- D 3/4" Actuation (19.0 mm)
- E Float
- F 1-7/16" (36.5 mm)
- G Retaining Ring
- H 3-1/2" REF. (88.9 mm)
- I 25' Cable

Electrical Termination: 22 AWG, 2-Wire
Cable-Jacket Material Optional