



RIGHT-SIDE VIEW

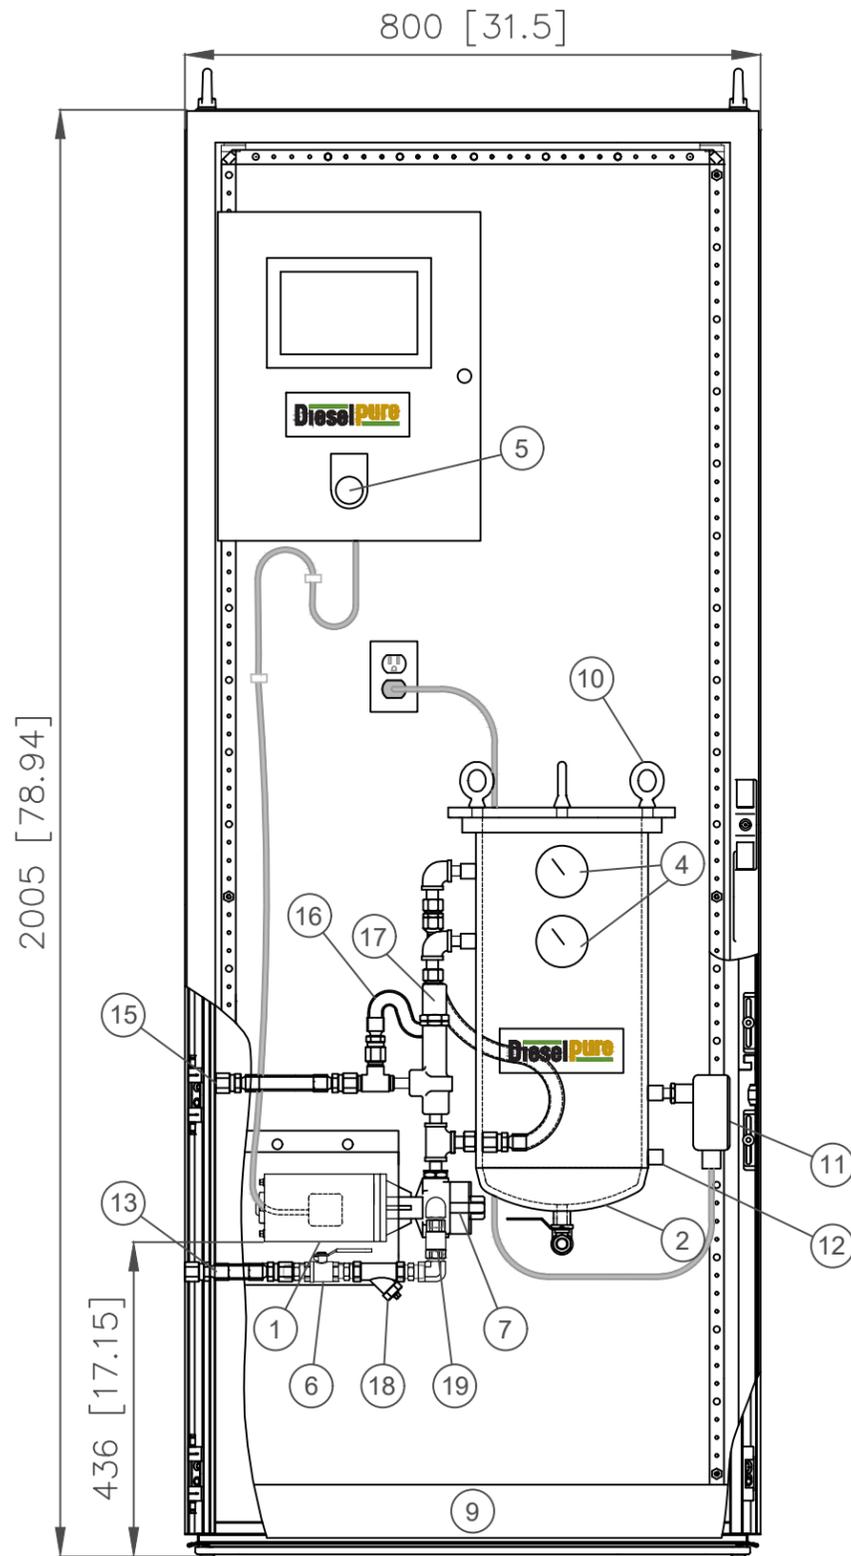

FRONT VIEW

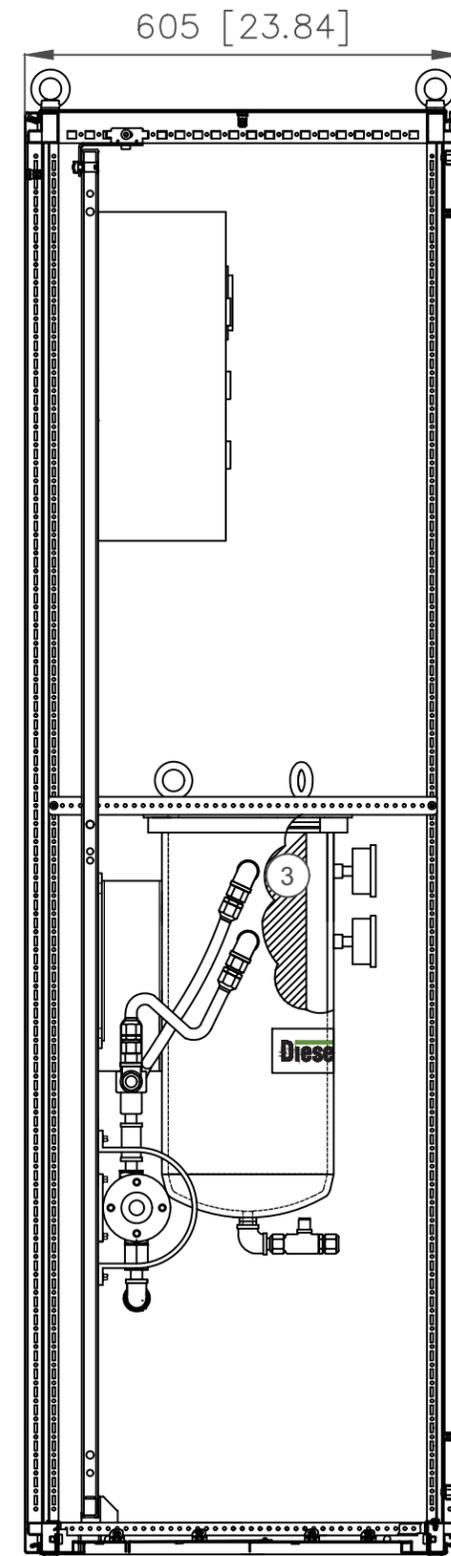

LEFT-SIDE VIEW

NO.	DESCRIPTION
1	3 PHASE 200 - 500 V MOTOR
2	ASME PRESSURE VESSEL
3	DIESELPURE COALESCING ELEMENT
4	LIQUID FILLED PRESSURE GAUGES
5	CONTROL PANEL (C.S.A. APPROVED)
6	INLET ISOLATION VAVLE
7	CONTINUOUS DUTY GEAR PUMP
8	WATER DRAIN VALVE
9	DRIP TRAY
10	LID BOLTS
11	OPTIONAL HEATER - 120 V OUTLET
12	WATER SENSOR
13	FUEL INLET/SUCTION
14	LIFT POINTS
15	FILTERED FUEL OUTLET
16	STAINLESS STEEL BRAIDED FLEXLINE - JIC
17	PRESSURE BYPASS VALVE
18	STRAINER
19	CHECK VALVE

INSTALLATION NOTES:

- A. 208-240 V 3 PHASE 50/60 HZ FOR MOTOR. OPTIONAL 380- 500 V 3 PHASE SUPPORT MUST BE SPECIFIED ON P.O.
- B. EXTERNAL PIPE TO BE MECHANICALLY PROTECTED.
- C. USE MINIMUM NUMBER OF JOINTS POSSIBLE.
- D. SUCTION LINE MAY REQUIRE ADDITIONAL ANTI-SYPHON DETAILS.
- E. 120 V SINGLE PHASE DEDICATED 15 A CIRCUIT IS REQUIRED FOR OPTIONAL IMMERSION HEATER.

DieselPure

200 SERIES



www.core-es.com
800.628.5502