

The Leak Gauge—Type K

Price Book Page 6



Top mounted liquid leak gauge that can measure from 6 inches to 170 inches in depth. Bushing size can be 2" or 1.5". Gauges are custom made in house to fit your tank. This gauge is designed to monitor either the interstitial space of a double wall containment system, or it can mount into an external monitoring pipe.

Additional Options:


Audible Alarm Accessory: This add on feature can turn your mechanical visual gauge into an audible leak detection alarm. (*price book page 8*)

Gauge Guard: A cover that protects the exposed plastic components on top of the gauge.

Material Choices and Limitations:

Standard choices are listed on picture to the left.

Due to floatation, this gauge does not have many material options. The leak gauge is rarely exposed to the liquid. If it is not compatible and it is exposed, the gauge must be replaced afterward.

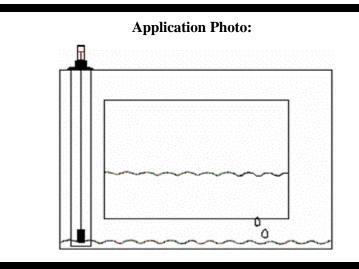

Part Number— K-(size opening)-(total length)-(list options) Sample—K-2-48-Guard

76" and smaller Polypropylene Float 77" and taller Poly Coated Cork Float

Calibration: Consists of 3 pieces. Outer plastic

piece, inner plastic piece, and a piece of paper in between. Optional glass inner piece is

Red Lock Nut: HDPE Plastic, Also

1.5". Special package allows for a Stainless Steel Bushing also.

Internal Rods: Standard construction is aluminum rods. There are no other options for this gauge due


Bushing: Aluminum bushing, can be 2",

available in aluminum or PVC.

available

to floatation.

Krueger Sentry Gauge 1873 Siesta Lane Green Bay, WI 54313





Contact us for more info or a loca distributor: Ph: 920-434-8860 Fax: 920-434-8897 Email: info@ksentry.com





The Leak Gauge—Type K Price Book Page 6

Model	Calibration	Indicator	Lock Nut	Bushing	Internal Rods	Union	Floats	Gasket
Standard (6"-76")	Cellulose Acetate-Plastic	HDPE	HDPE	Aluminum	Aluminum- 1/8"	Plated Nickel—1/8"	Polypropylene	Nitrile
Standard (6"-144")	Cellulose Acetate-Plastic	HDPE	HDPE	Aluminum	Aluminum— 3/16"	Brass—3/16"	Poly coated cork	Nitrile
Options available for all of above	GLC -Glass internal, plastic external		ALN- Aluminum Lock Nut					VTN—Viton

Sample Part Number-K-2-76-GLC

Other Options Available on the Type K Gauge

Price Book Page 6

Level Gauge Accessory	Description	Web Link
At-A-Glance Alarm	Audible Hi or Lo Level Alarm Accessory. Retrofits right to gauge. 110 decibel alarm. 9volt lithium battery.	http://www.ksentry.com/alarm.htm
Gauge Guard Aluminum or PVC	Durable sleeve that covers the plastic components on top of the gauge. Extend the life of the exposed parts of the gauge, and protect it from physical damage.	http://www.ksentry.com/replace.htm

